

New !

Akyprint®

Polypropylene Bubble Structure Material

A new high tech polypropylene product dedicated to the display market


A Unique Patented Technology

A three-layer sheet made of a thermoformed central layer and two solid sheets on the external layers with the following properties:

- ~ High bubble density for homogeneous rigidity
- ~ Large bubbles for lightness and flatness
- ~ An attractive sanded finish for better printability

Main Characteristics:

- ~ Rigidity
- ~ Lightness
- ~ Flatness
- ~ Sand finish
- ~ Opacity
- ~ Flame retardant
- ~ Convertible (die-cutting, creasing, welding, perforation...)
- ~ Resistant to chemical agents
- ~ Moisture resistant and rot-proof
- ~ Environmentally friendly

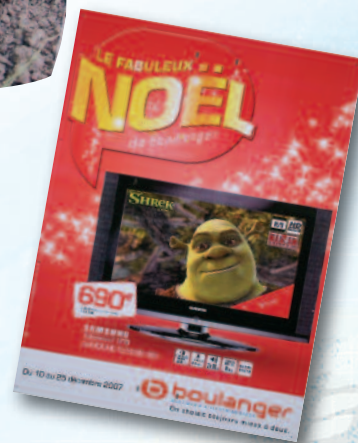


Applications

Akyprint® is suitable for:

- ~ **Printing:** it is the optimal solution for all recto-verso applications.
- ~ Suitable for **interior and exterior applications.**
- ~ **Lamination:** due to the smooth surface, you can easily laminate any film.
- ~ **Advertising:** suitable for converted products such as displays, boxes...
- ~ **Stand building:** thanks to its lightness, there is no problem in handling large sheets.

* We recommend performing a test in advance to validate the print quality, which depends on the machine's parameters.



VISUAL
COMMUNICATION

KaysersbergPlastics



Our Range

	Outdoor (UV protection)		Indoor (flame retardant)	
Thickness (mm)	3	5	3	5
Weight (g/m ²)	900	1600	900	1600
Format (mm)	1200 x 2000 2050 x 3050	1200 x 2000 2050 x 3050	1200 x 2000 2050 x 3050	1200 x 2000 2050 x 3050
Colour	White	White	White	White
Treatment (2 sides)*	Corona + UV protection	Corona + UV protection	Corona	Corona
Flame retardant	–	–	B-s2, d0**	C-s3, d0 (to be confirmed) B1
Palletization (sheets/pallet)	300	200	130	80

* Standard electrical discharge treatment that gives best printability, guaranteed for three months at a minimum of 42 dynes.

** Equivalent to M1 and B1

Additional features, on request: Antistatic.

Other formats available on request.

Tolerances	Weight +/-5%	Thickness +0,1/-0,2 mm	Length 0/+1%	Width +/-2 mm
------------	-----------------	---------------------------	-----------------	------------------

Recommended Inks

This information is only indicative and is non-exhaustive. A print test should be run in all cases. Don't hesitate to contact the suppliers for further information. Digital inks are currently undergoing tests.

Suppliers	Technique	Inks
MARABU	Silk screen	Maraprop PP Marapoly P Ultraform UV FM170
SERICOL	Silk screen	Polydyne YD+ZC521 Poluscreen PS386+ZV551 Multydyne LY+ZE818 Uviplast UP+ZE832
BRANCHET	Silk screen	Range Kromoplast
DUBUIT	Silk screen	Uviplak + 5% hardener ST305

Akyprint®

A Kayzersberg Plastics Product

DS SMITH KAYSERSBERG SAS

B.P. 27

F-68240 Kayzersberg

Tel.: +33 (0)3 89 78 32 65

Fax: +33 (0)3 89 78 38 56

E-mail : christine.klack@kayplast.com

The information contained in this document is for information purposes and is non-contractual. The manufacturer reserves the right to change the product and its technical characteristics. This information has been supplied in good faith and does not in any way constitute a guarantee for specific conditions of use.

DS SMITH KAYSERSBERG - Établissement Plastiques - SAS au capital de 53 816 000 € - RCS COLMAR 572 219 202 SIRET 572 219 202 00072

PRINT151 GB 04/2009